




Research Stereo Microscope SMZ25/18

Research Stereo Microscope

SMZ25

SMZ18

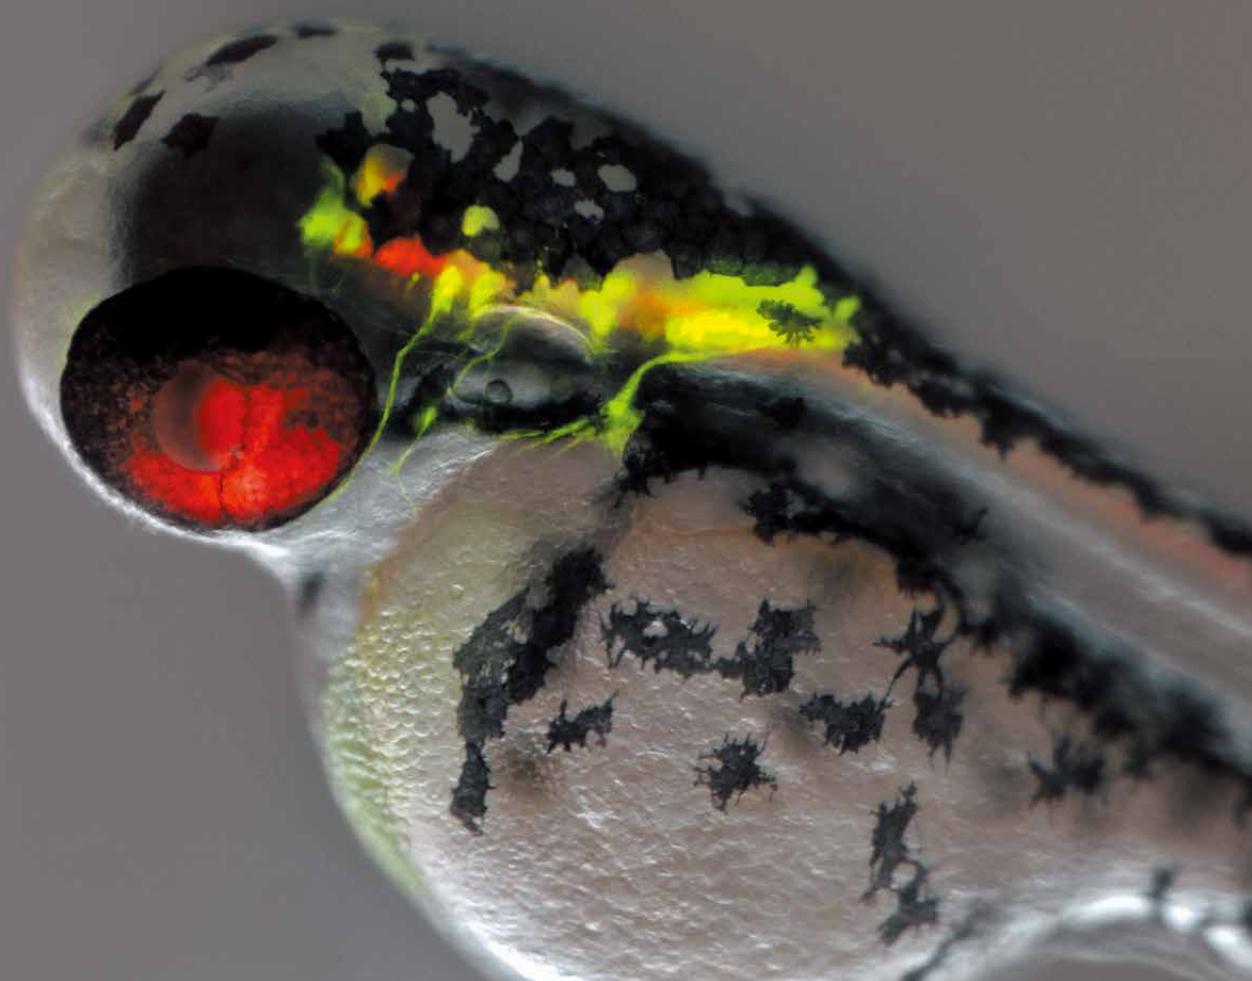

Live zebrafish expressing GFP- and RFP-neurons, imaged with Nikon's latest research stereo microscope, the SMZ25 (fluorescence and OCC). Image courtesy of Joe Fetcho, Ph.D., Cornell University.

Discover a New Evolution Giant Step Forward in Stereo Microscopy

Traditional boundaries between scientific fields, such as molecular biology and developmental biology, are rapidly disappearing as researchers seek to connect findings at the molecular level to those derived from studies of cells, tissue, and organisms. Fields including molecular biology, cell biology, neurobiology, embryology, developmental biology and systems biology have increasing needs for imaging systems that span spatial scales from single cells to whole organisms.

With these demands in mind, Nikon's stereo microscope features a large zoom ratio of 25:1, high resolution, and exceptional fluorescence transmission capability.

Great zoom range and high resolution

- Our first stereo microscope to offer a 25:1 zoom range (SMZ25)
- Both eye paths boast numerical apertures (NA) of up to 0.156, using the SHR (Super High Resolution) Plan Apo 1x objective and SMZ25 zooming body

Bright and high contrast fluorescence imaging


- Fly eye lens ensures uniform brightness over the entire field of view even at the lowest magnifications
- The optical design results in a high signal to noise ratio and crystal clear fluorescence imaging

Automation and digital imaging

- Motorized focus and zoom operation (SMZ25)
- Imaging Software NIS-Elements enables the use of multiple imaging, processing and analysis modalities including z-stack capture, time-lapse imaging, and the generation of EDF images

Easy to use

- User-friendly remote control (SMZ25)
- Easy-to-operate slim LED DIA base with OCC illumination
- Wide range of illuminators and accessories accommodate a variety of observation methods

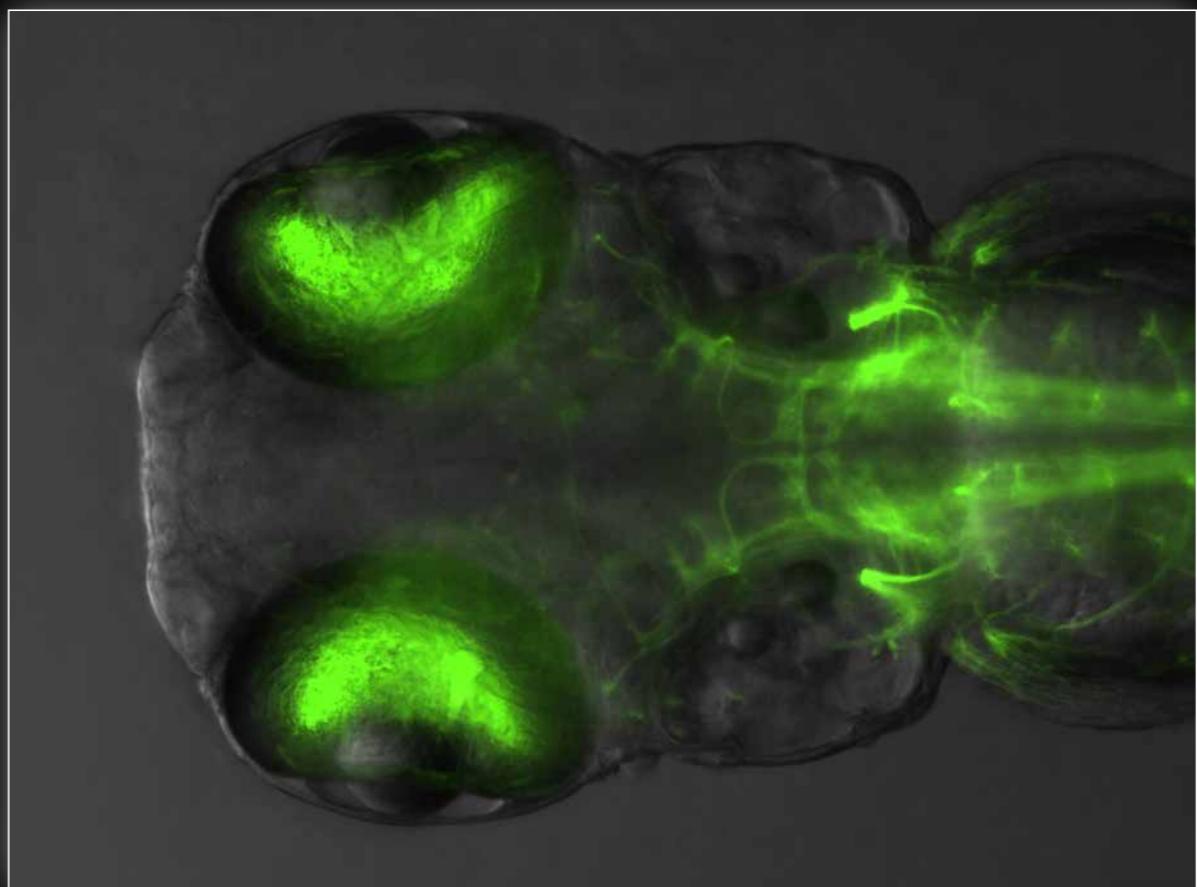

▲ Live transgenic zebrafish larva Tg (chat:Gal4, UAS:Dendra-kras) expressing membrane-bound Dendra in cholinergic neurons at 3 days post fertilization (stereomicroscope SMZ25, fluorescent and brightfield images)
Image courtesy of Dr. Fumi Kubo, Dr. Hisaya, Kakinuma
Laboratory for Sensorimotor Integration, RIKEN Center for Brain Science



SMZ25

Motorized zoom model with the highest zoom ratio and resolution in the SMZ series



SMZ18

Manual zoom model providing advanced optical performance and very bright fluorescence at an economical cost


	Motorized zoom	Manual zoom
Zooming observation	BF/DF/FL/Simple polarizing	BF/DF/FL/Simple polarizing
Zoom ratio	25:1	18:1
Magnification range	0.63x-15.75x	0.75x-13.5x
Maximum magnification	315x ^{*1}	270x ^{*1}
Maximum FOV	ø70 mm ^{*2}	ø59 mm ^{*2}
Maximum NA of objective	0.312 ^{*3}	0.3 ^{*3}

*1: Using SHR Plan Apo 2x and C-W 10x *2: Using SHR Plan Apo 0.5x and C-W 10x *3: Using SHR Plan Apo 2x

Great zoom range and high resolution


Dynamic zoom ratio of 25:1 SMZ25

The optical zoom system, the Advanced Zoom System, achieves a zoom ratio of 25:1 (zoom range: 0.63x - 15.75x). Even with a 1x objective lens, the SMZ25 captures the entire 35 mm dish and simultaneously delivers microscopic details.

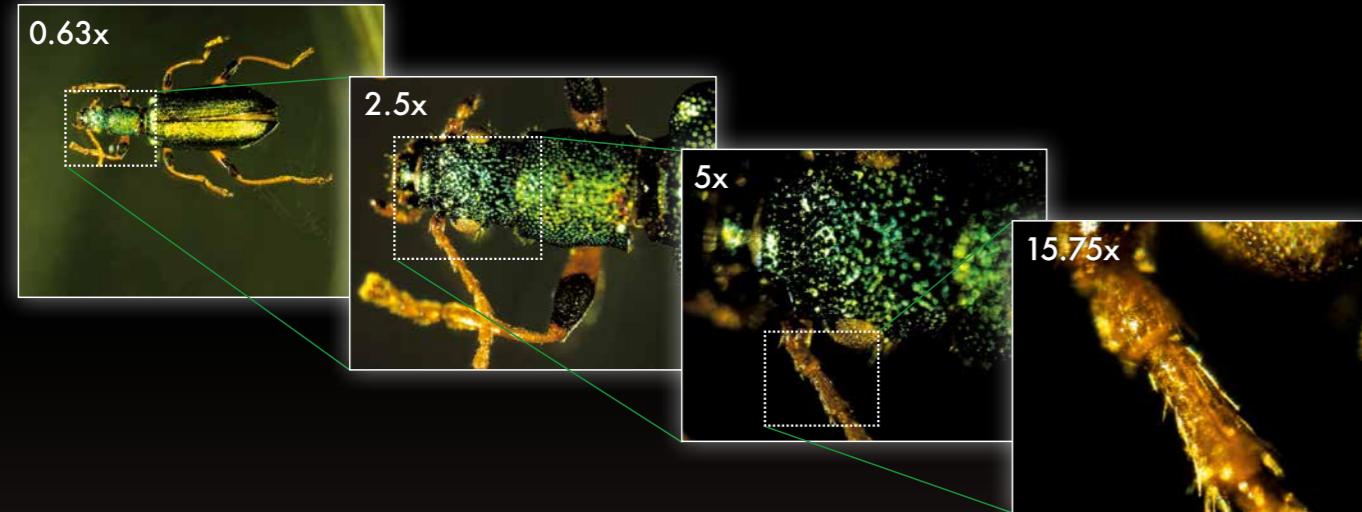

Auto Link Zoom (ALZ) supports seamless viewing at different scales SMZ25

ALZ automatically adjusts the zoom factor to maintain the same field of view when switching objective lenses. This function enables seamless switching between whole organism imaging at low magnifications and detailed imaging at high magnifications.

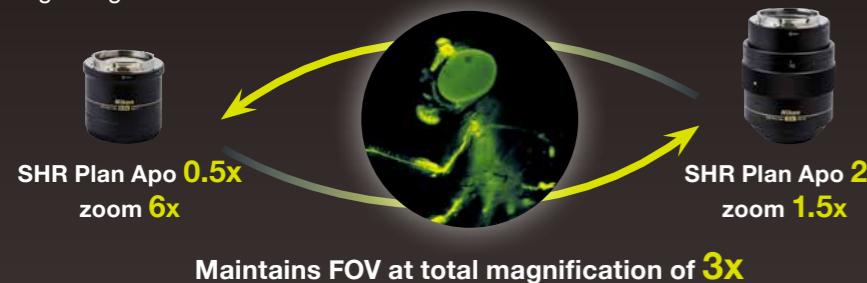


Maintains FOV at total magnification of 3x

Adult Drosophila
Pebbled-Gal4 drive membrane-bound GFP expression in partial cells (with SMZ25)
Image courtesy of Hokto Kazama, Ph.D. Laboratory for Circuit Mechanisms of Sensory Perception RIKEN

Offers a very high zoom ratio thanks to Nikon's Advanced Zoom System SMZ25


The Advanced Zoom System dynamically changes the distance between the two optical axes as the zoom factor is changed. This change in optical axis distance enables maximization of light entry into the optical system at every magnification. The result is an uncompromised, large zoom range, high resolution in both eye paths, and minimal aberrations over the entire zoom-range. Furthermore, this optical design enables all of these desirable features to be housed in a compact zoom body, resulting in an ergonomic instrument design.

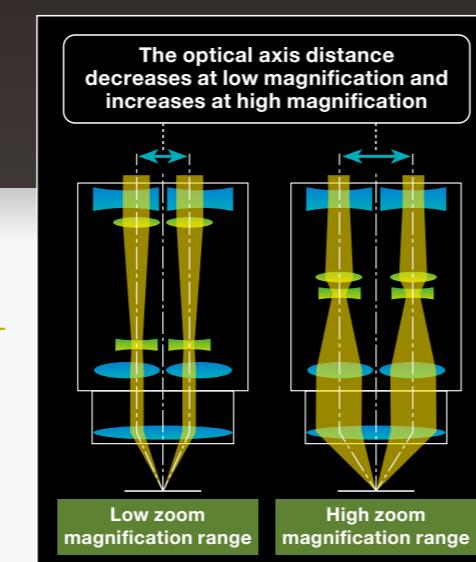

Higher NA in both eye paths coupled with a great zoom ratio provides seamless viewing on the macro and micro levels.


Covers from macro observations to micro observations with one stereomicroscope

Nikon's SMZ25 and SMZ18 offer a great NA of 0.156 on the SHR Plan Apo 1x and 0.312 on the SHR Plan Apo 2x. Traditionally, researchers have had to switch to a higher magnification microscope to view microscopic details after using a stereo microscope to view or manipulate macroscopic structures. Nikon's SMZ25 and SMZ18 eliminate this need by providing both macroscopic and microscopic imaging capabilities. For example, the SHR Plan Apo 2x objective allows for visualization of structures as small as a few microns in size, which was once considered to be impossible on a stereo microscope. Apochromatic correction is maintained in both the objective lens and the optical zoom system, virtually eliminating color aberrations.

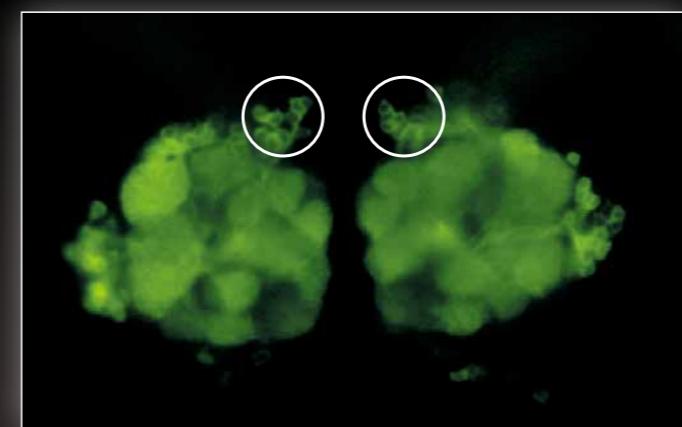

Individual olfactory nerve cells in a drosophila expressing a GFP-membrane marker are clearly resolved as black bodies encircled by fluorescent membranes (see circled area). This image demonstrates the SMZ25's very high resolution because the olfactory cells are typically only $\varnothing 5\mu\text{m}$ in diameter.

Drosophila brain (GFP)
(using SHR Plan Apo 2x at zoom magnification of 15.75x with SMZ25)
Image courtesy of Hokto Kazama, Ph.D.
Laboratory for Circuit Mechanisms of Sensory Perception RIKEN

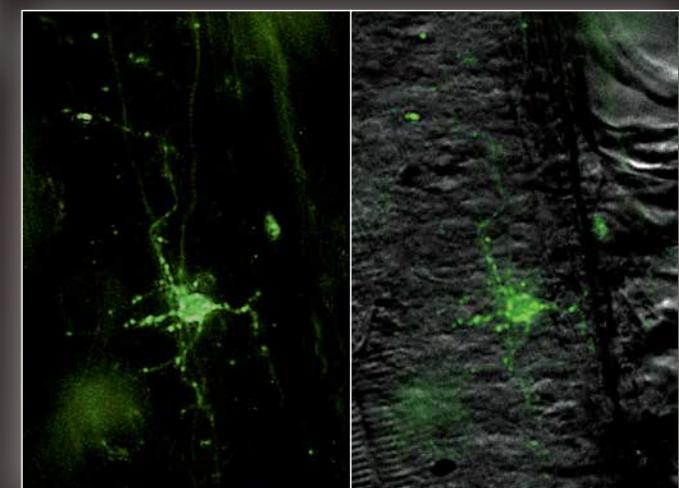


A single motor neuron expressing clusters of GFP-glycine receptors (resolved as individual puncta along the cell body and processes) imaged in a live zebrafish

Zebrafish (GFP and OCC)
(using SHR Plan Apo 2x at zoom magnification of 15.75x with SMZ25)
Image courtesy of Joe Fetscho, Ph.D., Cornell University

High-performance objective lens SMZ25 SMZ18

Nikon's objective lens series, the SHR Plan Apo series, offers a high resolution of 1100LP/mm (Observed value, using SHR Plan Apo 2x at maximum zoom). The SHR Plan Apo series of lenses delivers brilliant images with true-to-life colors.


Comparison of resolution by resolution chart

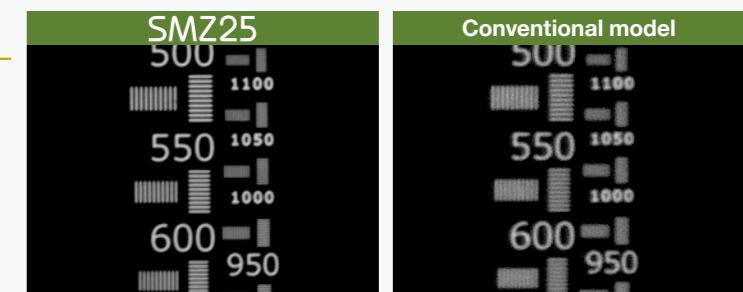

Bright and high contrast fluorescent images

Enhanced brightness and uniform illumination in low magnification range

Even at low magnification, the SMZ25 and SMZ18 capture the entire 35 mm dish with equal brightness over the whole field of view*, making these new stereo microscopes appropriate for live screening of developmental models, such as *C. elegans*, *drosophila*, zebrafish, and mice, to identify and select mutants. The SMZ25 and SMZ18 also allows brilliant images to be captured even with low excitation light levels, minimizing photo-bleaching and photo-toxicity which is harmful to live cells and organisms. *When using the SHR Plan Apo 1x on the SMZ25


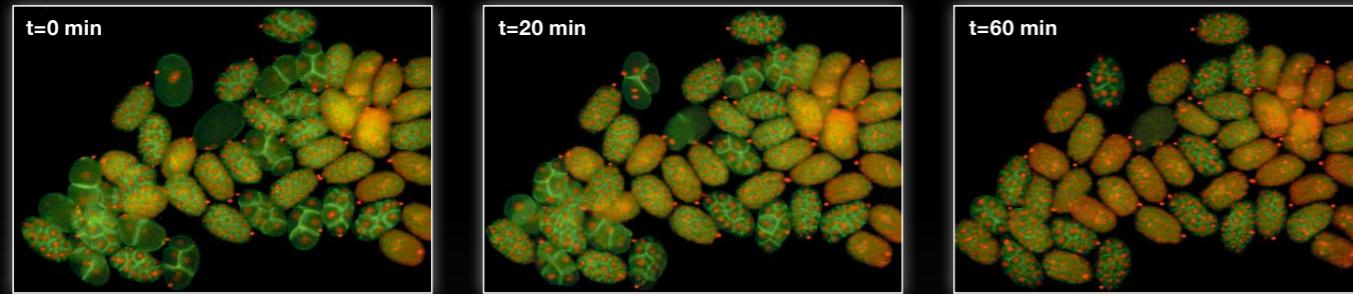


Time-lapse imaging of developing *C. elegans* embryos expressing RFP-histones and GFP-membrane markers allows researchers to screen for cytokinesis mutants prior to selection for downstream applications

C. elegans embryos (GFP and RFP; each ovoid is ϕ 30 μ m in diameter) (using SHR Plan Apo 2x at zoom magnification of 8x with SMZ25)
Image courtesy of Julie C. Canman, Ph.D., Columbia University.

Mouse whole-brain slice (YFP)


(Using SHR Plan Apo 1x at zoom magnification 0.63x with SMZ25)
Image courtesy of Tadatsune Iida, MD., Ph.D. and Shigeo Okabe, M.D., Ph.D.
Department of Cellular Neurobiology, Graduate School of Medicine and Faculty of Medicine, the University of Tokyo

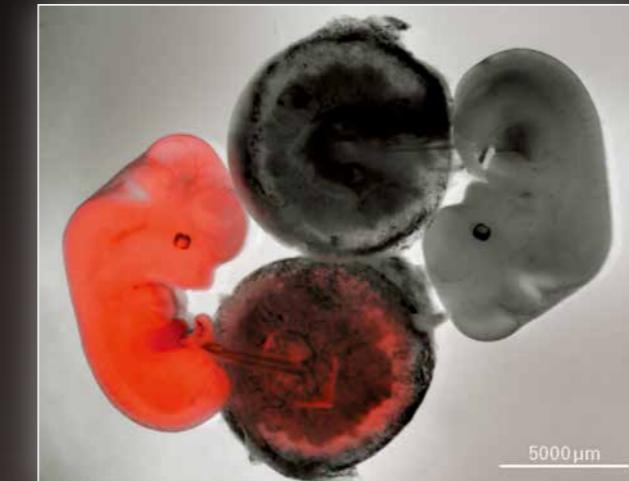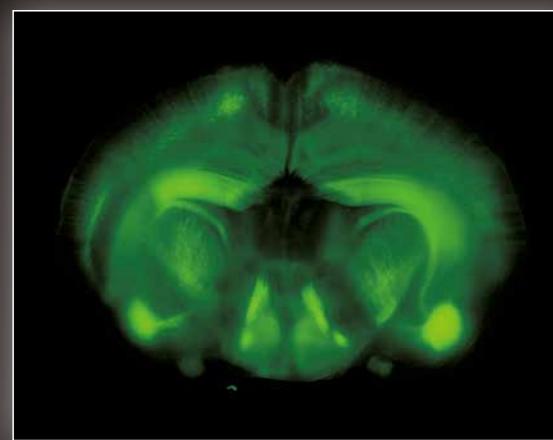

12.5 day old mouse embryo, Red: Nucleus
(Using SHR Plan Apo 0.5x at zoom magnification 1.30x with SMZ18)
Image courtesy of Kazuo Yamagata, Ph.D.
Center for Genetic Analysis of Biological Responses, Research Institute for Microbial Diseases, Osaka University

Fly eye lens ensures uniform brightness over the entire field of view

The SMZ25 and SMZ18 use a fly eye lens on an epi-fluorescence attachment. This makes it possible to have uniform illumination out to the edge of the field of view. In particular, when using a low-magnification objective lens for viewing of a wide field, it is possible to get photographs that are evenly bright.

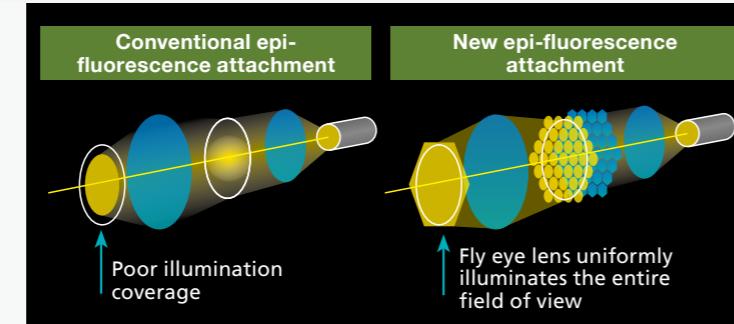


Newly developed epi-fluorescence attachment for clear fluorescence imaging.

Improved S/N ratio and crystal clear fluorescence imaging thanks to an improved optical system

Nikon's newly developed optical system offers improvement in S/N ratio even at high magnifications. This improved S/N ratio makes it possible to capture cell division, which is difficult using conventional stereo microscopes, and samples with low excitation light.



The spindle (which is marked with a * in the white square) appearing in cell division can be observed.

Fertilized mouse egg, Green: Spindle (EGFP- α tubulin), Red: Nucleus (Histone H2B-mRFP1)
(using SHR Plan Apo 1x at zoom magnification of 13.5x with SMZ25)
Image courtesy of Kazuo Yamagata, Ph.D.
Center for Genetic Analysis of Biological Responses, Research Institute for Microbial Diseases, Osaka University

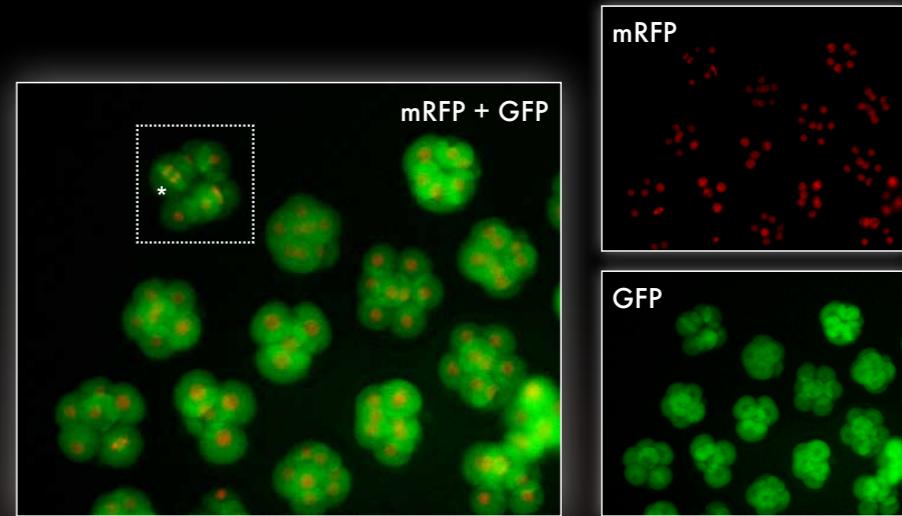

Single fluorescent neurons can be visualized in live *C. elegans*

Fluorescence and OCC images of a live *C. elegans* expressing GFP- and RFP-neurons
(using SHR Plan Apo 2x at zoom magnification of 3x with SMZ25)
Image courtesy of Julie C. Canman, Ph.D., Columbia University

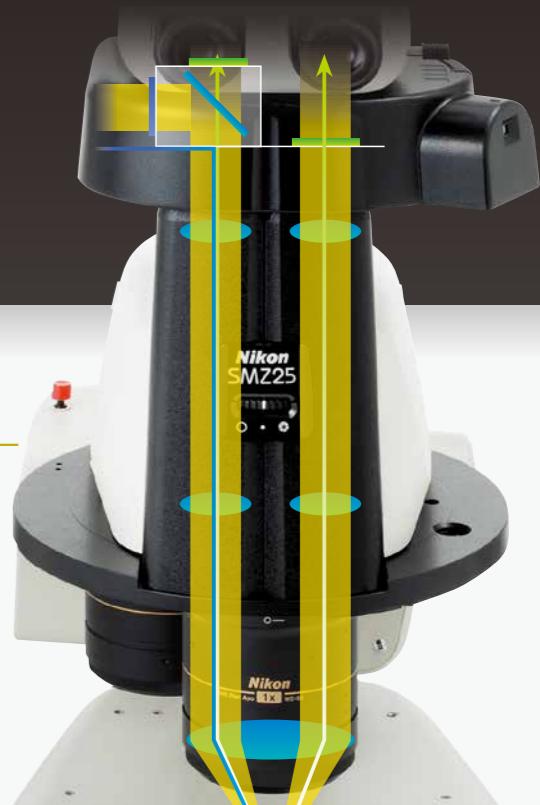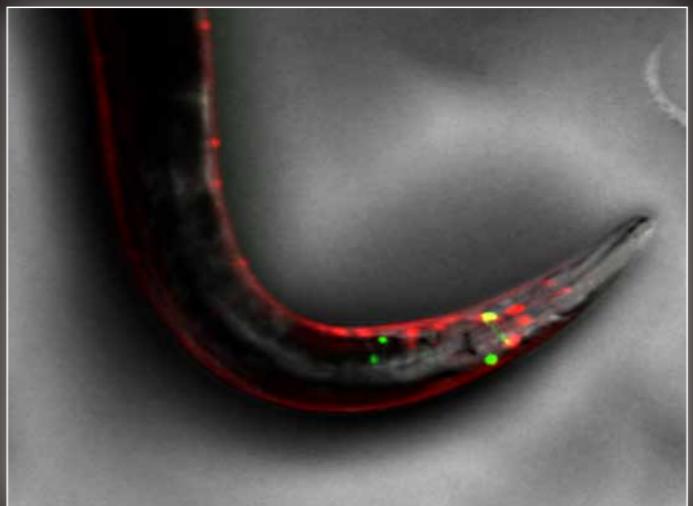

A zoom body appropriate for observations with fluorescent lighting

Nikon has succeeded in improving the signal and reducing noise in fluorescence imaging by using a short wavelength, high transmission lens. Combined with an innovative epi-fluorescence attachment, the SMZ25 and SMZ18 are better able to detect excitation light than conventional fluorescent stereo microscopes.

Automation and digital imaging

A wide range of digital imaging capabilities with the Digital Sight series and NIS-Elements imaging software.

User-friendly remote controller SMZ25

The remote controller provides easy access to zoom and focus controls and is designed for both right and left hand use. The remote controller contains an LCD monitor with an adjustable backlight which provides information regarding the zoom factor, objective lens, filter cube, and LED DIA brightness at a glance. The backlight on the LCD monitor can also be turned off to eliminate interference with low-light imaging applications. In addition to the remote controller, the microscope can also be operated through a PC.




Access the information you want quickly and easily SMZ25 SMZ18

Easily obtain the information you need, such as Z drive position, zoom factor, objective lens, filter cube, and LED DIA brightness by using the Digital Sight series and NIS-Elements together with the microscope.

On-axis imaging for digital images

Easily switch between stereo position (stereoscopic view) and mono position (on-axis view) when using the P2-RNI2 Intelligent Nosepiece by simply sliding the objective lens.

Digital images with great clarity can be captured using the mono position.

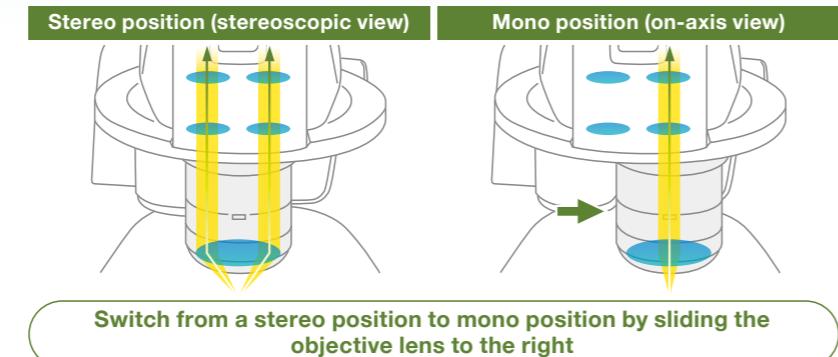


One software for all systems: NIS-Elements, which is Nikon's flagship cross-platform imaging software, can be used with Nikon's stereomicroscope systems, SMZ25 and SMZ18. With NIS-Elements, a wide range of advanced digital imaging capabilities are easily accessible from a PC.

Multichannel (multicolor)


Multiple fluorescent channels can be captured in conjunction with other imaging methods, such as OCC or brightfield.

Individual cells resolved in a live drosophila embryo expressing GFP and mCherry (using SHP Plan Apo 2x at zoom magnification of 8x with SMZ25)
Image courtesy of Max V. Staller, Ph.D., Clarissa Scholes, and Angela DePace, Ph.D., Harvard Medical School

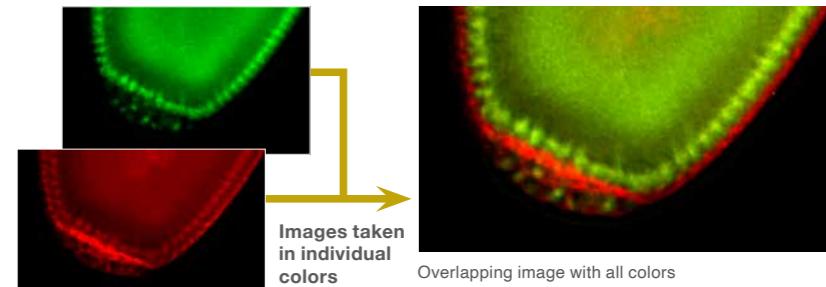


Time lapse

Easily setup a time-lapse imaging experiment with NIS-Elements.

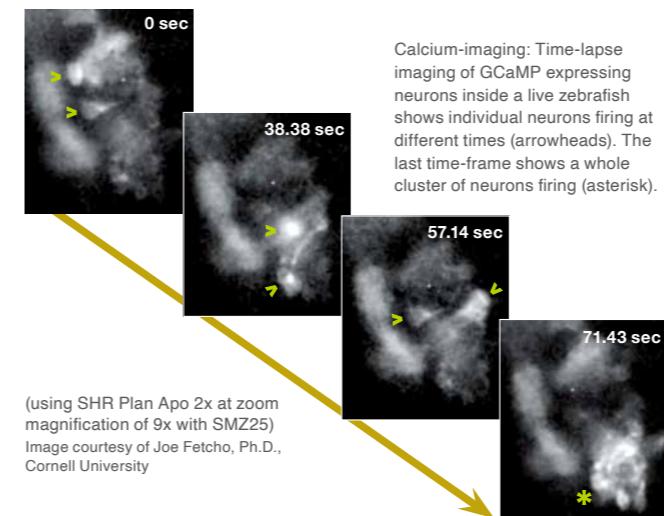

Extended depth of focus (EDF)

Capture multiple high resolution images at different focal depths to create a single extended depth of focus image or quasi-3D image.

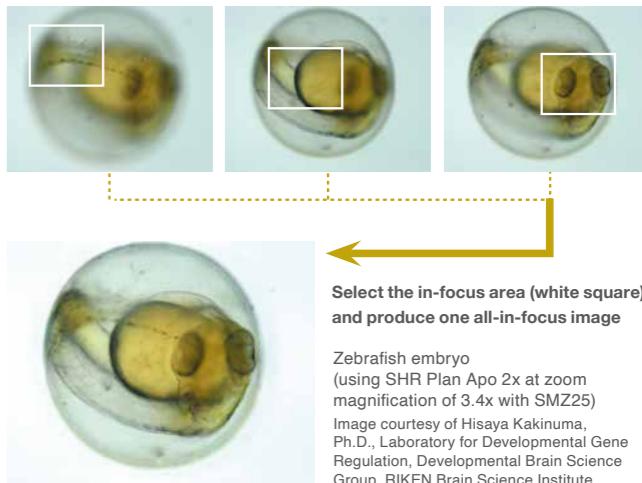

Imaging software
NIS-Elements
Advanced Solutions for your Imaging World

for a desktop/
tablet PC

A free software package that enables easy setup, control, live image display, and image acquisition for microscope digital cameras.

Supported cameras: Digital Sight 50M, Digital Sight 10, Digital Sight 100,

Digital Sight 1000

(Supported OS: Windows 11 Pro 64-bit)

*For PC specifications, please contact us.



Select the perfect camera for your application.

Color / Monochrome Digital Camera for Microscopes

Digital Sight 10

- High-resolution 23.9-megapixels
- Switch between color and monochrome photography
- High-speed live display



23.9-megapixel Color/Monochrome High-resolution

Monochrome Digital Camera for Microscopes

Digital Sight 50M

- High-resolution 60.0-megapixels
- High sensitivity and low noise
- High quantitative capacity
- High-Speed imaging



60.0-megapixel Monochrome Cooled

Color Digital Camera for Microscopes

Digital Sight 100

- Equipped with a 17.7-megapixel 1-inch color CMOS image sensor
- Observation possible via monitor
- HDMI connection
- Excellent color reproduction



17.7-megapixel Color High-resolution

*For more details, see the Digital Sight series catalogues.

Wide range of available accessories

Base unit

Nikon has improved ease of use by moving the controls to the front of the base, including the brightness adjustment dial and on/off switch.

Fiber DIA base


The Fiber DIA base features condenser lenses that can be switched between low and high magnifications. Furthermore, the Oblique Coherent Contrast (OCC) illumination system allows high contrast illumination.



① P2-DBF Fiber Diascopic Illumination Base

② P2-DBL LED Diascopic Illumination Base

③ P2-PB Plain Base

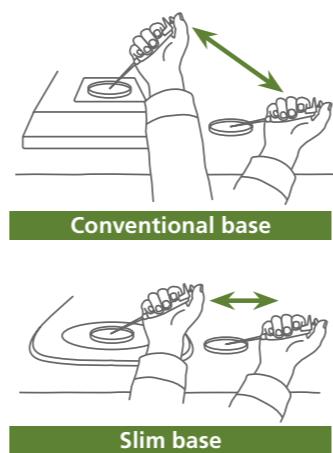


Example applications

OCC illuminator

The new LED DIA Base with a built-in OCC illuminator generates minimal heat, consumes little power and is long-life. This illuminator can enhance the contrast of uneven surfaces, such as that of an embryo.



Zebrafish embryo (using SHR Plan Apo 1x at zoom magnification of 5x with SMZ18)
Image courtesy of Junichi Nakai, Ph.D. Saitama University Brain science Institute

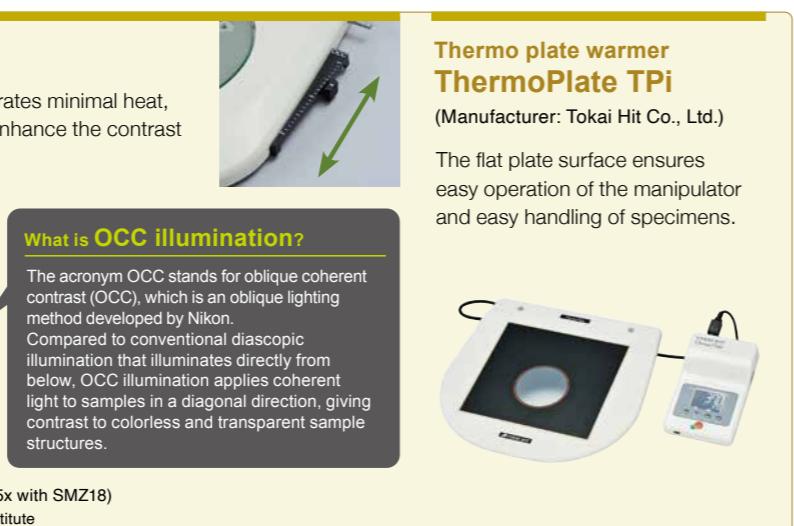

What is OCC illumination?

The acronym OCC stands for oblique coherent contrast (OCC), which is an oblique lighting method developed by Nikon. Compared to conventional diascopic illumination that illuminates directly from below, OCC illumination applies coherent light to samples in a diagonal direction, giving contrast to colorless and transparent sample structures.

Focus unit

The focus unit is combined with the base unit. Choose from either a manual or motorized focus unit.



① P2-MFU
Motorized Focus Unit

② P2-FU Focus Unit

Stand / Focus mount

SMZ18

The SMZ18 can be mounted on various compact stands using a focus mount.



① P2-FMDN Focus Mount
② P-PS32 Plain Stand

③ P-DSL32 LED Diascopic Illumination Stand
④ P-DSF32 Fiber Diascopic Illumination Stand

SHR Plan Apo series of objective lenses

The SHR Plan Apo series features higher NA, wider field of view, and superior flatness and color aberration correction.

These objective lenses can be easily switched because all magnifications have the same parfocal distance. The bayonet mount allows lenses to be safely and easily removed.



① P2-SHR Plan Apo 0.5x
② P2-SHR Plan Apo 1x
③ P2-SHR Plan Apo 1.6x
④ P2-SHR Plan Apo 2x

	SHR Plan Apo 0.5x	SHR Plan Apo 1x	SHR Plan Apo 1.6x	SHR Plan Apo 2x
Maximum NA	SMZ25	0.078	0.156	0.25
	SMZ18	0.075	0.15	0.24
Working distance	71 mm	60 mm	30 mm	20 mm
Correction ring	—	—	—	3 mm water depth
Wavelength	380-700 nm			

Tubes

Choose from two types of tilting trinocular tube and one type of low eyelevel trinocular tube. All tubes have a camera port for seamless integration with the Digital Sight series.



① P2-TERG100 Trinocular Tilting Tube (eyepiece: port 100:0 / 0:100)
② P2-TERG50 Trinocular Tilting Tube (eyepiece: port 100:0/50:50)
③ P2-TL100 Trinocular Tube L (eyepiece: port 100:0 / 0:100)

Nosepiece / Focus mount adapter

Choose from either a single or double nosepiece to expand research by changing the magnification range.



① P2-RNI2 Intelligent Nosepiece
② P2-FM Focus Mount Adapter

Stage

The stage features an XY stroke of 6x4* inches (150 mm x 100 mm) and can be attached to any of the bases, making it effective for capturing large images when used in combination with the imaging software NIS-Elements. A sliding stage and tilting stage are also available.

*Limited Y travel with 32 mm column bases



④ P-SXY64 XY Stage

Remote Controller

In addition to microscope operations such as vertical focusing, zooming, switching the fluorescent filter cube, and adjusting the light intensity of the transmitted light LED illumination, the Digital Sight series microscope digital camera's photographic operations can also be easily operated by hand while looking through the eyepiece.



⑤ P2-RC Remote Controller

Wide range of available accessories

Epi-fluorescence set

■ Motorized epi-fluorescence set

The fluorescent turret can be operated using the remote control or imaging software NIS-Elements.



- ① P2-EFLM2 Motorized Epi Fluorescence Attachment
- ② Light shading Plate (comes with Fluorescence Attachment)
- ③ P2-EFL Filter Cube (GFP-B/GFP-L/RFP)
- ④ P2-EFLBF Filter Cube (Bright Field, with $\lambda/4$ plate)
- ⑤ P2-CTLA Control Box



- ⑥ P2-RC Remote Controller

■ Manual epi-fluorescence set

An easy-to-use manual model for Nikon's high-performance epi-fluorescence attachment.



- ① P2-EFLI2 Epi Fluorescence Attachment
- ② Light shading Plate (comes with Fluorescence Attachment)
- ③ P2-EFL Filter Cube (GFP-B/GFP-L/RFP)
- ④ P2-EFLBF Filter Cube (Bright Field, with $\lambda/4$ plate)
- ⑤ P2-CTLB Control Box



Combinations with SMZ18

Fiber illuminator sets

■ Flexible double arm fiber illumination set

The direction and angle of illumination can be changed to suit the sample by making adjustments with these double arms. The fiber holder position can also be changed to obtain the optimal position for illuminating samples.

- ① C-FDF Flexible Double Arm Fiber Illumination Unit
- ② C-FIDH Fiber Holder
- ③ C-FLED2 LED Light Source for Fiber Illuminator



In combination with the SMZ25

■ Ring fiber illumination set

This ring fiber illumination set features an episcopic illumination unit that effectively captures images (can be used with 1x and 0.5x objective lenses).

- ① P2-FIR Ring Fiber Illumination Unit
- ② C-FLED2 LED Light Source for Fiber Illuminator



In combination with the SMZ25

Coaxial illuminator

The coaxial light illuminator makes it possible to view light reflected from the surface of a sample, which is ideal for shooting shadowless images of thick samples.

- ① P2-CI Coaxial Epi Illuminator
- ② C-FLED2 LED Light Source for Fiber Illuminator



In combination with the SMZ18

Ring LED illuminator

The ring LED illuminator is equipped with high-intensity and long-life LEDs. The illuminator's dial adjusts the intensity of the white LED.

- ① P2-FIRL2 LED Ring Illumination Unit



In combination with the SMZ18

Darkfield observation accessory

Darkfield viewing is possible simply by attaching the dark field unit to the base.

- ① P-DF LED Dark Field Unit
- ② Shading cover



Specifications

	SMZ25	SMZ18
Zooming Body		
Optical system	Parallel-optics type (zooming type), apochromatic optical system	
Zoom	Motorized	Manual
Zoom ratio	25:1	18:1
Zoom range	0.63-15.75X	0.75-13.5X
Aperture diaphragm	Zooming body built-in	Zooming body built-in
Objectives NA, WD (mm)		
• P2-SHR Plan Apo 2X	0.312, 20 (with a correction ring for water 0 to 3 mm in depth)	0.3, 20 (with a correction ring for water 0 to 3 mm in depth)
• P2-SHR Plan Apo 1.6X	0.25, 30	0.24, 30
• P2-SHR Plan Apo 1X	0.156, 60	0.15, 60
• P2-SHR Plan Apo 0.5X	0.078, 71	0.075, 71
Total Magnification (Using 10X eyepieces)	3.15-315X (Depending on objective used)	3.75-270X (Depending on objective used)
Eyepieces (F.O.V. mm)	• C-W 10XB (22) • C-W 15X (16) • C-W 20X (12.5) • C-W 30X (7)	
Tubes (Eyepiece/Port)	• P2-TERG 100 Trinocular Tilting tube (100/0 : 0/100) • P2-TERG 50 Trinocular Tilting tube (100/0 : 50/50) Inclination angle : 0-30 degree • P2-TL100 Trinocular Tube L (100/0 : 0/100) Inclination angle : 10 degree	
Focus Unit (Stroke from Objective's parfocal point)	• P2-MFU Motorized Focus Unit (Up 96 mm/Down 4 mm) • P2-FU Focus Unit (Up 97 mm/Down 5 mm)	
Focus mount Adapter/Nosepiece	• P2-FM Focus Mount Adapter • P2-RNI2 Intelligent Nosepiece (2 objectives can be attached)	• P2-FM Focus Mount Adapter • P2-RNI2 Intelligent Nosepiece (2 objectives can be attached) • P2-FMDN Focus Mount (for P-PS32, P-DSL32 and P-DFS32 stand)
Bases/Stand	• P2-PB Plain Base • P2-DBL LED Diascopic Illumination Base (OCC illuminator built-in) • P2-DBF Fiber Diascopic Illumination Base • P-PS32 Plain Stand*	• P-PS32 Plain Stand* • P-DFS32 Fiber Diascopic Illumination Stand*
Stages	• P-SXY64 Stage • C-SSL Dia-sliding Stage • C-TRS Tilting Stage	
Epi-Fluorescence Attachments	4 filter cubes mountable, Fly eye lens built-in • P2-EFLM2 Motorized Epi Fluorescence Attachment • P2-EFLI2 Epi Fluorescence Attachment	
Episcopic Illuminators	• P2-FIRL2 LED Ring Illumination Unit Use with Fiber light source • P2-CI Coaxial Epi Illuminator • P2-FIR Ring Fiber Illumination Unit • C-FDF Flexible Double Arm Fiber Illumination Unit	
Episcopic light sources	• C-FLED2 LED Light source for fiber illuminator	
Observation methods	Bright Field, Epi Fluorescence, Simple Polarizing (with P2-POL Simple Polarizing Attachment), Dark Field (with P-DF LED Dark Field Unit), Oblique lighting	
Weight (approx.)	32 kg (Motorized Epi Fluorescence Attachment configuration with Trinocular Tilting Tube, Motorized Focus Unit, Intelligent Nosepiece, LED DIA base and Objectives 1X and 0.5X)	30 kg (Epi Fluorescence Attachment configuration with Trinocular Tilting Tube, Focus Unit, Intelligent Nosepiece, LED DIA base and Objectives 1X and 0.5X)
Power consumption (approx.)	30 W (Motorized Epi Fluorescence Attachment configuration with Trinocular Tilting Tube, Motorized Focus Unit, Intelligent Nosepiece and LED DIA base)	10 W (Epi Fluorescence Attachment configuration with Trinocular Tilting Tube, Focus Unit, Intelligent Nosepiece and LED DIA base)

*Compatible with SMZ18 only

Polarizing observation accessory

The analyzer is attached to the objective and the polarizer to the base or stand to enable polarized viewing.


- ① P2-POL Simple Polarizing Attachment



Dimensions


SMZ25

(configured with motorized epi-fluorescence attachment and LED DIA base)

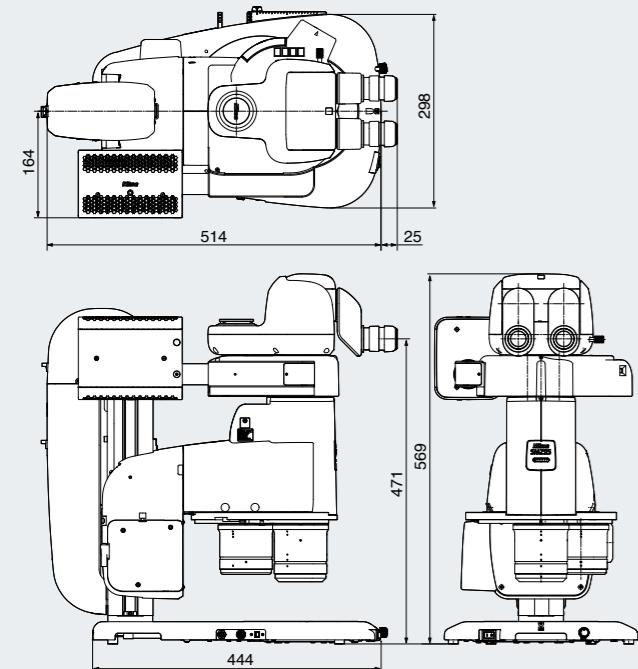


SMZ25

(configured with fiber DIA base)

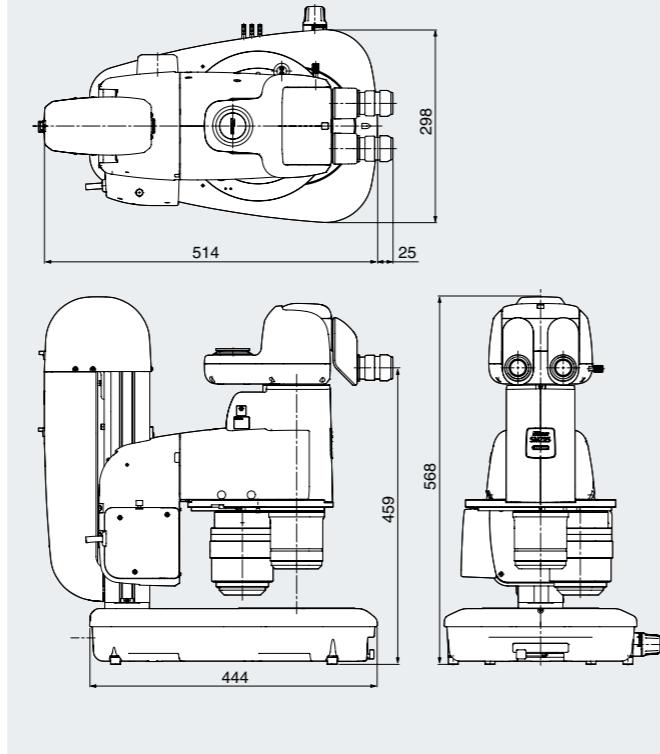


SMZ18

(configured with epi-fluorescence attachment
and LED DIA base)

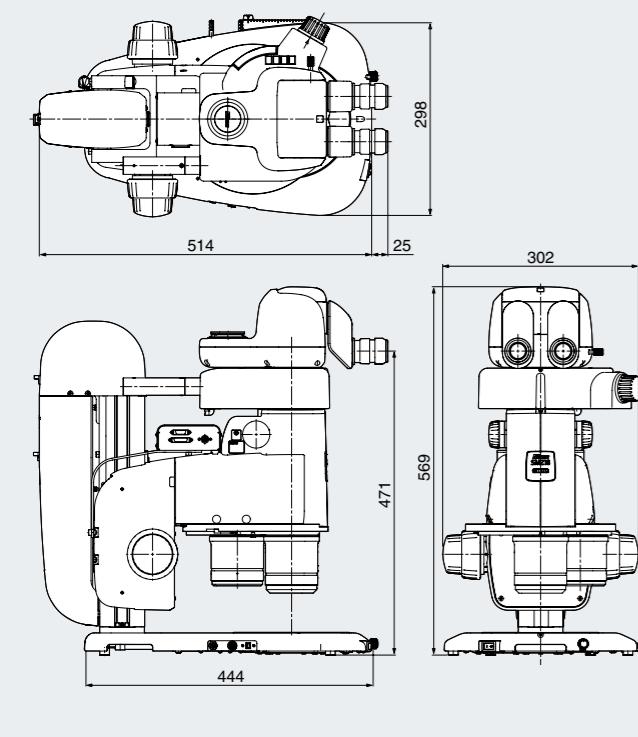


SMZ18

(configured with plain stand and focus mount)

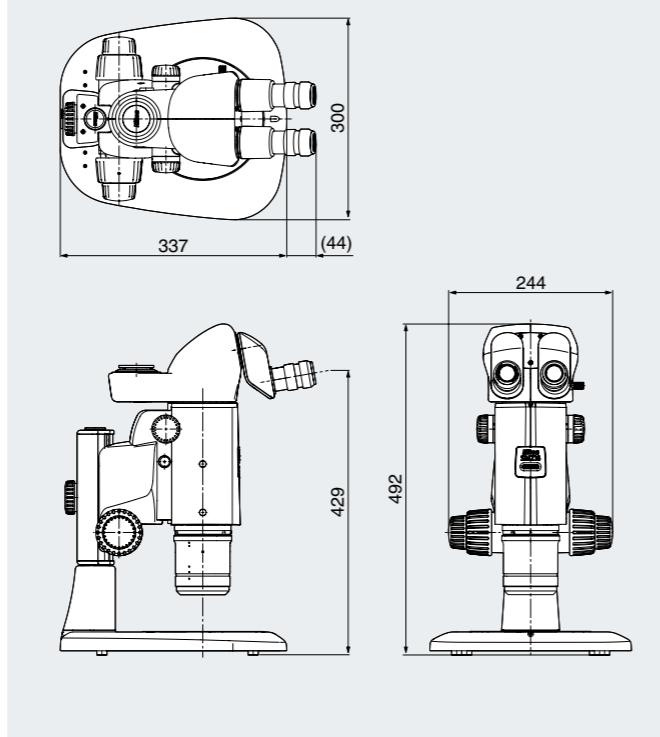

System diagram

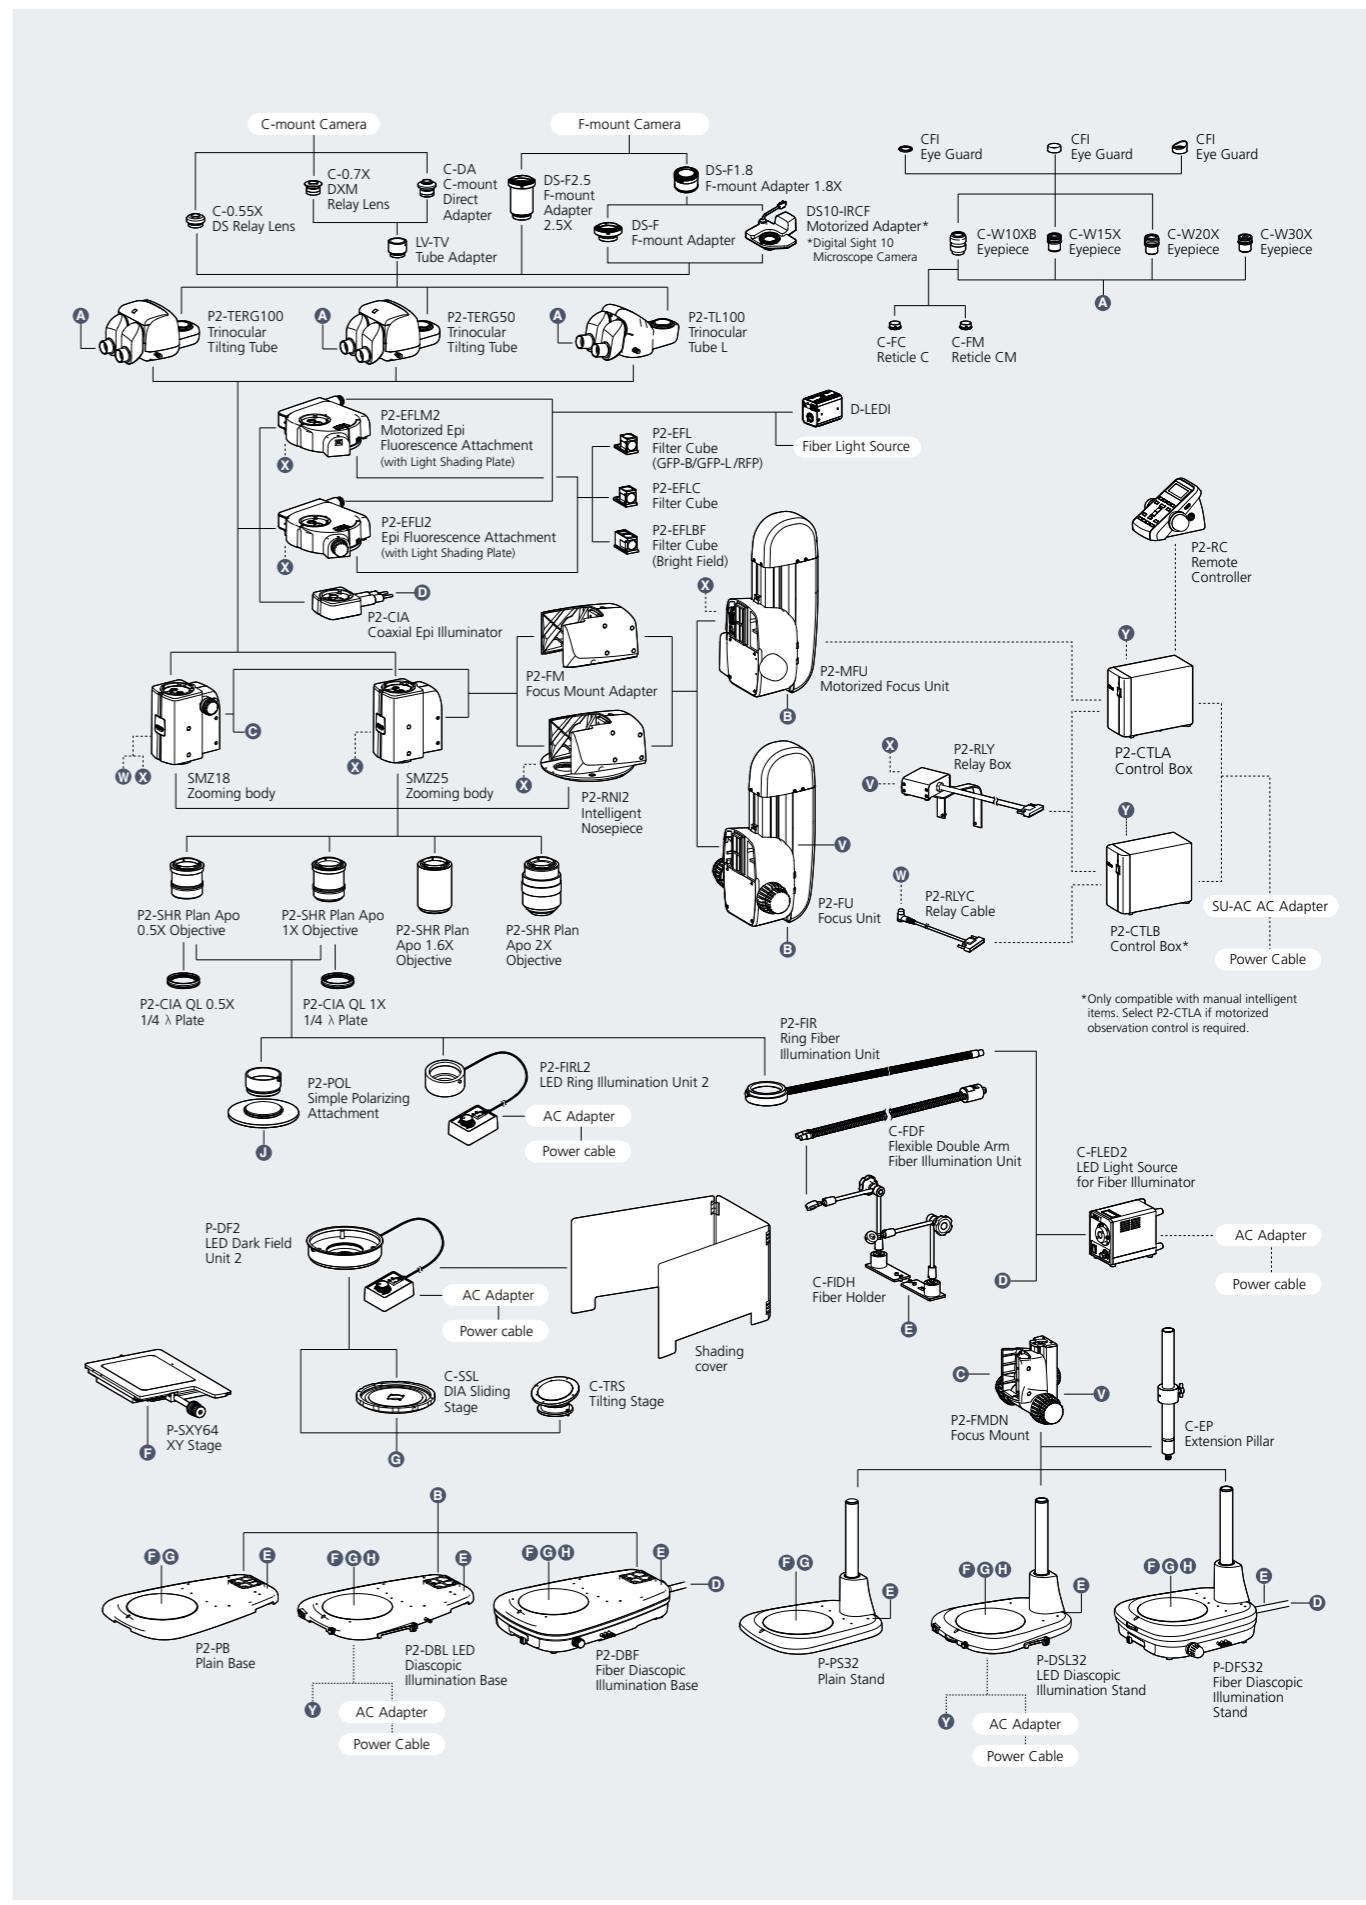

Note: the information listed for researchers who provided sample photographs is for when the photographs were first provided.

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. December 2025 ©2013-2025 NIKON CORPORATION
N.B. Export of the products* in this brochure is controlled under the Japanese Foreign Exchange and Foreign Trade Law. Appropriate export procedures shall be required in case of export from Japan.
*Products: Hardware and its technical information (including software)



TO ENSURE CORRECT USAGE, READ THE CORRESPONDING MANUALS CAREFULLY BEFORE USING THE EQUIPMENT.



NIKON CORPORATION

Head office

1-5-20, Nishioi, Shinagawa-ku, Tokyo, 140-8601, Japan
<https://www.healthcare.nikon.com/en/>

Manufacturer

471, Nagaodai-cho, Sakae-ku, Yokohama,
Kanagawa 244-8533, Japan

ISO 14001 Certified
for NIKON CORPORATION

Nikon Instruments Inc.

1300 Walt Whitman Road, Melville, N.Y. 11747-3064, U.S.A.
phone: +1-631-547-8500; +1-800-52-NIKON (within the U.S.A. only)
fax: +1-631-547-0299

<https://www.microscope.healthcare.nikon.com/>

Nikon Europe B.V.

Stroombaan 14, 1181 VX Amstelveen, The Netherlands
phone: +31-20-7099-000

https://www.microscope.healthcare.nikon.com/en_EU/

Nikon Precision (Shanghai) Co., Ltd.

CHINA phone: +86-21-6841-2050 fax: +86-21-6841-2060
(Beijing branch) phone: +86-10-5831-2028 fax: +86-10-5831-2026
(Guangzhou branch) phone: +86-2-3882-0551 fax: +86-2-3882-0580

<https://www.nikon-precision.com.cn/>

Nikon Canada Inc.

CANADA phone: +1-905-625-9910 fax: +1-905-602-9953

Nikon France, Succursale de Nikon Europe B.V.

FRANCE phone: +33-1-4516-4516

Nikon Deutschland, Zweigniederlassung der Nikon Europe B.V.

GERMANY phone: +49-211-9414-888

Nikon Italy, Branch of Nikon Europe B.V.

ITALY phone: +39-055-300-9601

Nikon Europe B.V., Amstelveen, Zweigniederlassung Schweiz (Egg/ZH)

SWITZERLAND phone: +41-43-277-2867

NIKON UK, Branch of Nikon Europe B.V.

UNITED KINGDOM phone: +44-208-247-1717

Nikon Österreich, Zweigniederlassung der Nikon Europe B.V.

AUSTRIA phone: +43-1-972-6111

Nikon Singapore Pte Ltd

SINGAPORE phone: +65-6559-3651 fax: +65-6559-3668

Nikon Australia Pty Ltd

AUSTRALIA phone: +61-2-8767-6900

Nikon Instruments Korea Co., Ltd.

KOREA phone: +82-2-6288-1900 fax: +82-2-555-4415

NIKON INDIA PVT. LTD.

AUSTRALIA phone: +91-124-4688-500